


REV A Correct 2 AN960-416L 1/25/07 GRH

REV B Change #1 to Hex Head from SHCS 10-15-08 GRH
 Change #2 to Nordloc from AN Washer
 Change #19 to -10L

USE MIL-H-5606 HYDRAULIC FLUID
 SAFETY WIRE ALL DRILLED BOLTS

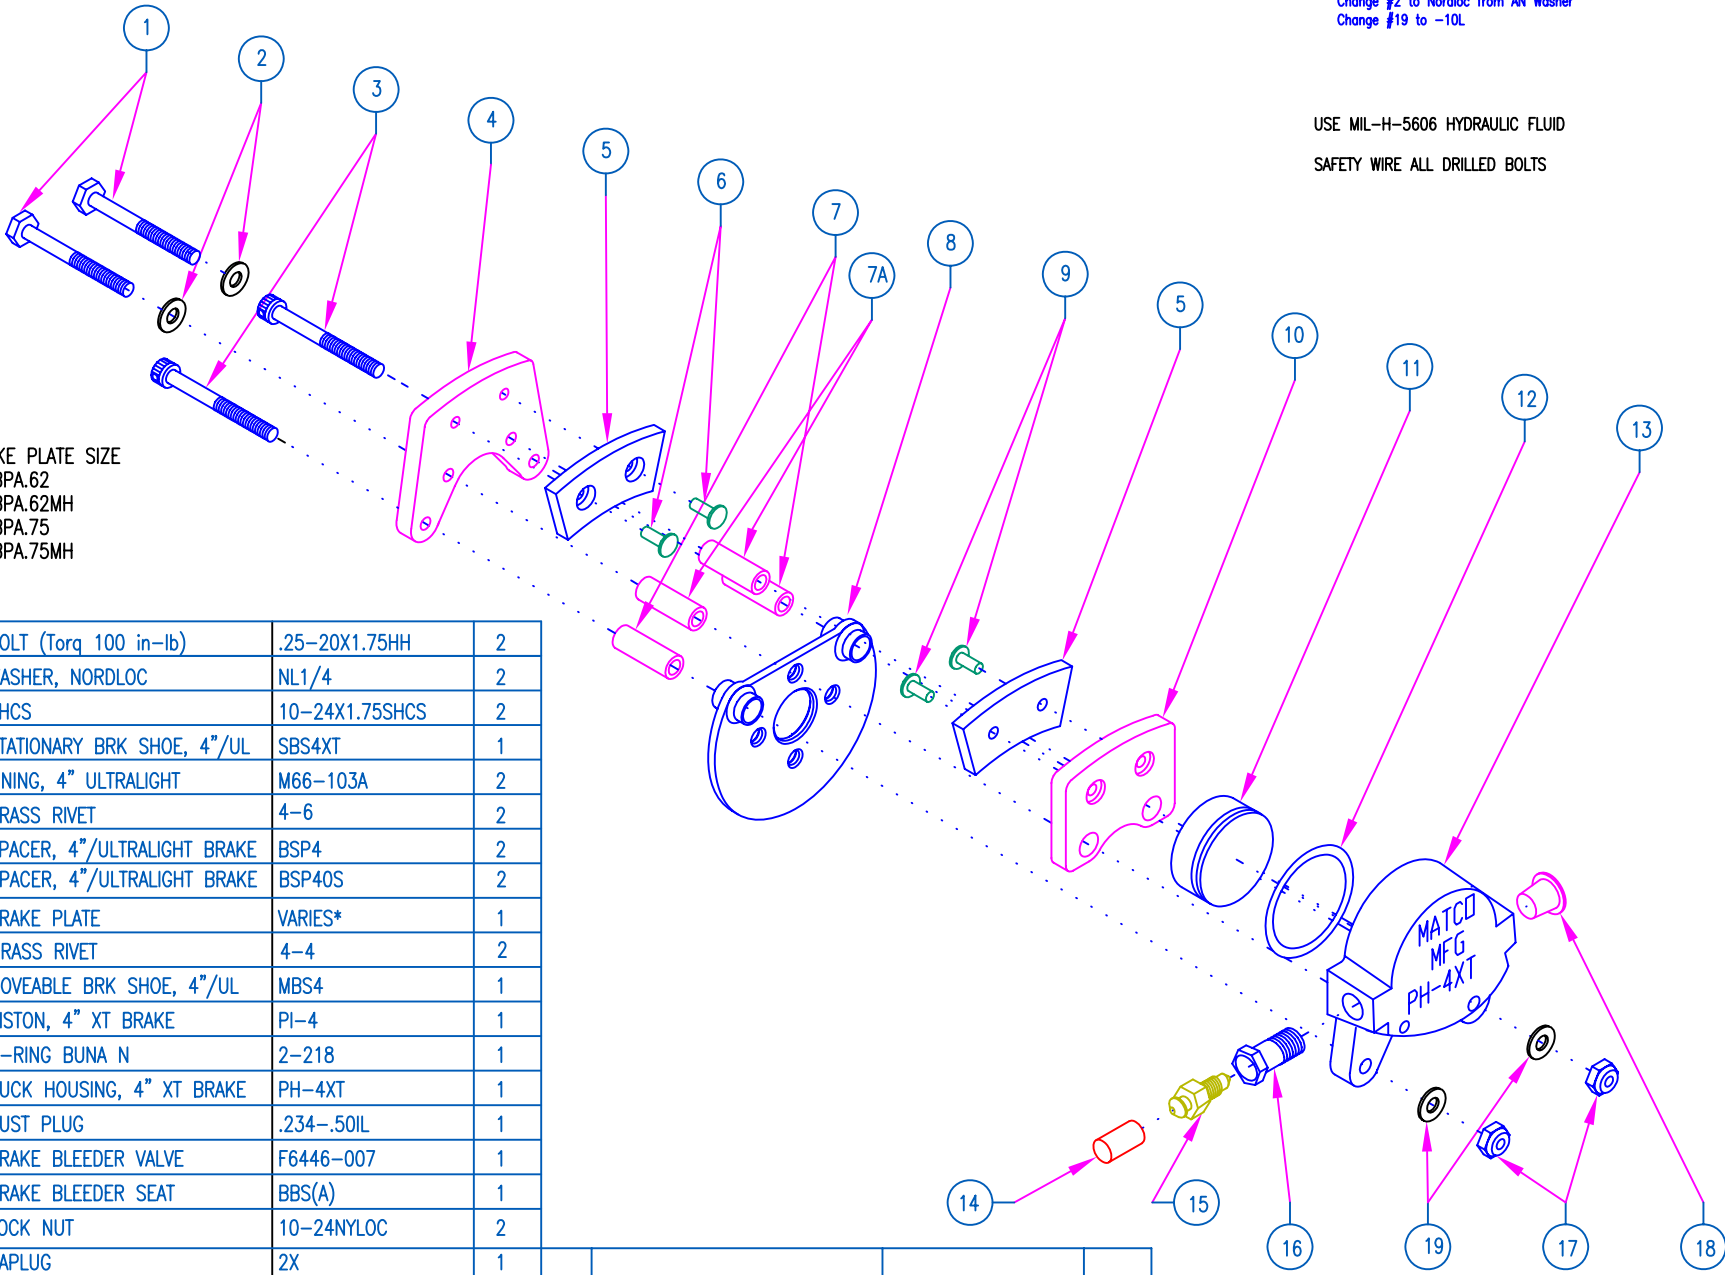

*BRAKE PLATE SIZE
 BPA.62
 BPA.62MH
 BPA.75
 BPA.75MH

1	BOLT (Torq 100 in-lb)	.25-20X1.75HH	2
2	WASHER, NORDLOC	NL1/4	2
3	SHCS	10-24X1.75SHCS	2
4	STATIONARY BRK SHOE, 4"/UL	SBS4XT	1
5	LINING, 4" ULTRALIGHT	M66-103A	2
6	BRASS RIVET	4-6	2
7	SPACER, 4"/ULTRALIGHT BRAKE	BSP4	2
7A	SPACER, 4"/ULTRALIGHT BRAKE	BSP4OS	2
8	BRAKE PLATE	VARIES*	1
9	BRASS RIVET	4-4	2
10	MOVEABLE BRK SHOE, 4"/UL	MBS4	1
11	PISTON, 4" XT BRAKE	PI-4	1
12	O-RING BUNA N	2-218	1
13	PUCK HOUSING, 4" XT BRAKE	PH-4XT	1
14	DUST PLUG	.234-.50IL	1
15	BRAKE BLEEDER VALVE	F6446-007	1
16	BRAKE BLEEDER SEAT	BBS(A)	1
17	LOCK NUT	10-24NYLOC	2
18	CAPLUG	2X	1
NO.	PART NAME	INVENTORY NO.	REQ'D
19	WASHER	AN960-10L	2

NO.	PART NAME	INVENTORY NO.	REQ'D
19	WASHER	AN960-10L	2

3-4BRAKE
MATCO mfg
 2361 S 1560 West
 WOODS CROSS, UT 84087 (801) 335-0582

3D FOUR INCH XT BRAKE ASSEMBLY

DRAWN BY: G. HAPP
 AUTHORIZED BY:

SCALE: NONE
 DATE: OCTOBER. 3, 2002

REVISION:
 B