


USE Mil-H-5606 Hydraulic Fluid

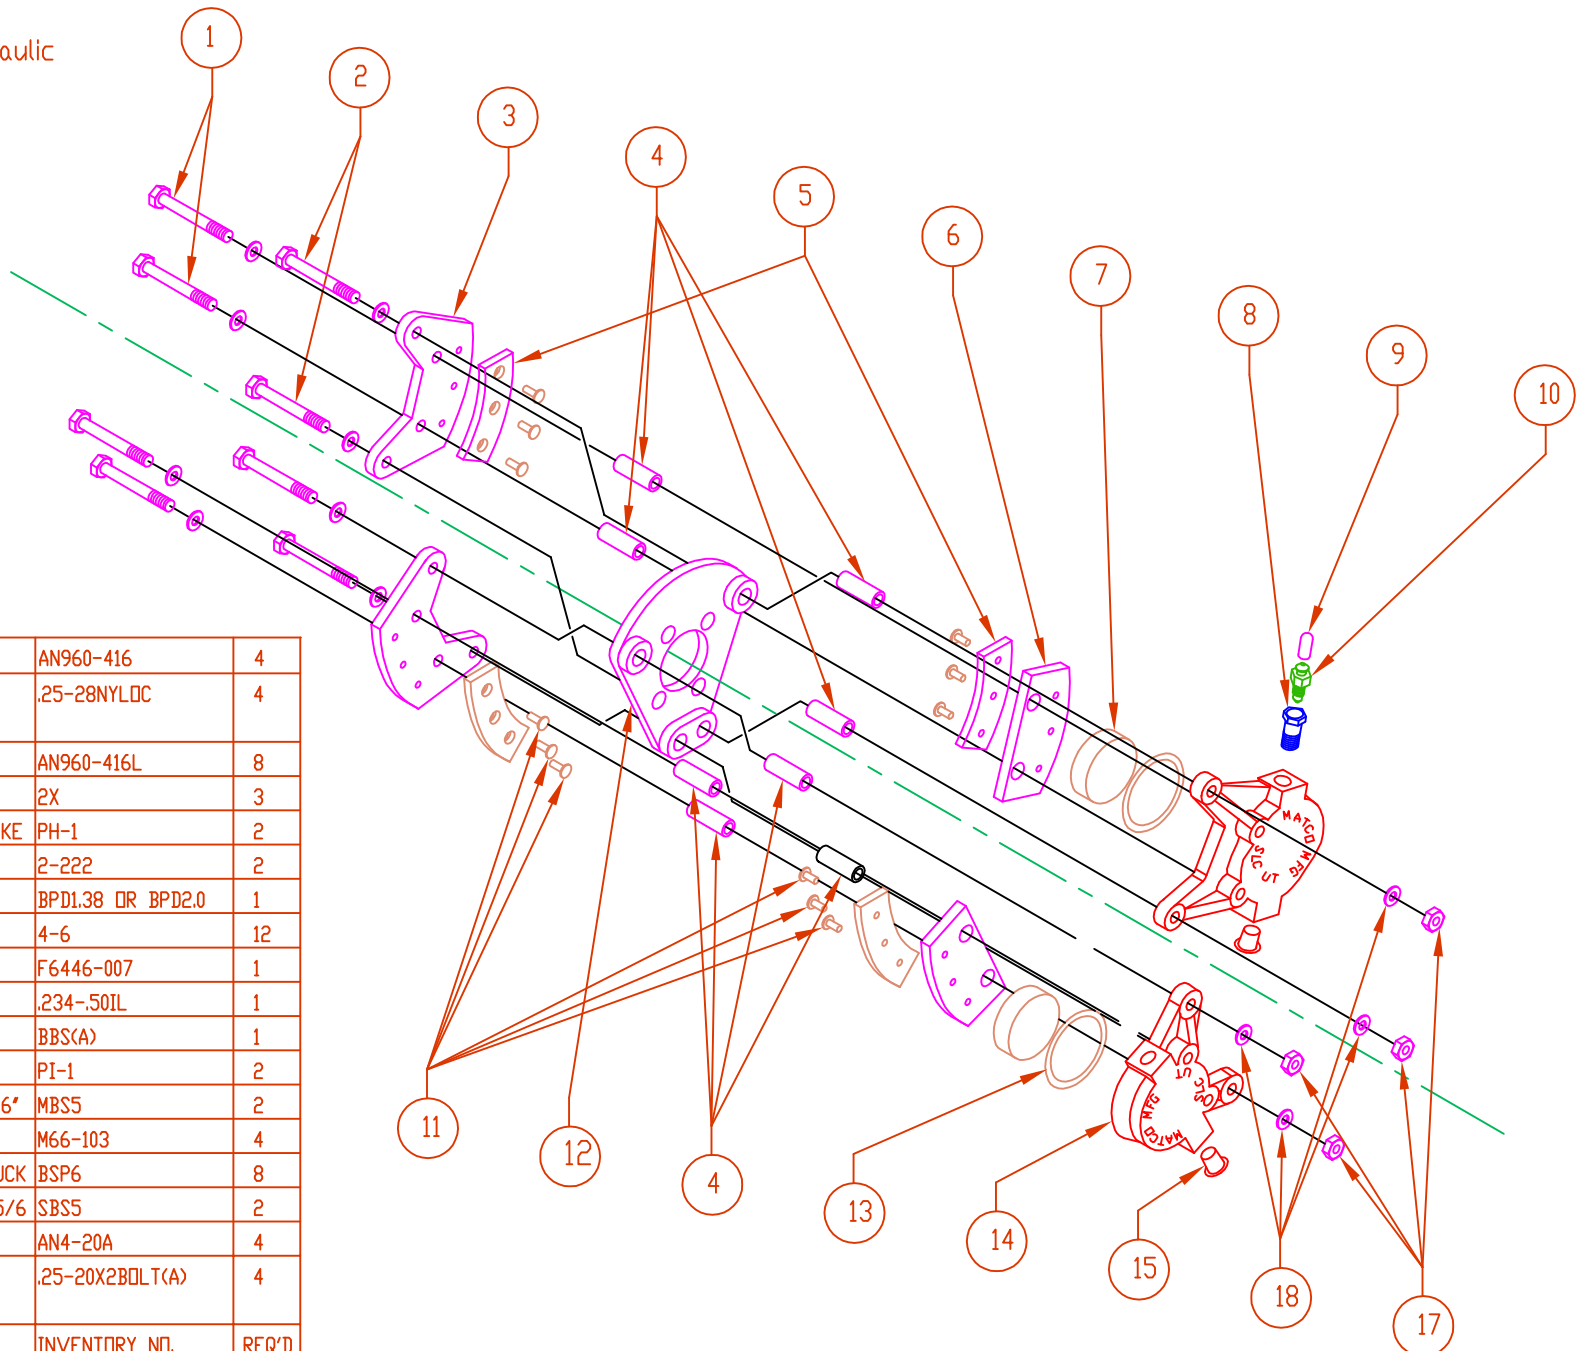

18	WASHER	AN960-416	4
17	LOCK NUT (TORQUE TO 50 IN. LBS.)	.25-28NYLOC	4
16	WASHER	AN960-416L	8
15	CAPLUG	2X	3
14	PUCK HOUSING, 5/6" BRAKE	PH-1	2
13	O-RING BUNA N	2-222	2
12	BRAKE PLATE	BPD1.38 DR BPD2.0	1
11	BRASS RIVET	4-6	12
10	BRAKE BLEEDER VALVE	F6446-007	1
9	DUST PLUG	.234-.50IL	1
8	BRAKE BLEEDER SEAT	BBS(A)	1
7	PISTON, 5/6" BRAKE	PI-1	2
6	MOVEABLE BRK SHOE, 5/6"	MBS5	2
5	LINING, 5/6" BRAKE	M66-103	4
4	SPACER, DUAL/TRIPLE PUCK	BSP6	8
3	STATIONARY BRK SHOE, 5/6"	SBS5	2
2	BOLT	AN4-20A	4
1	BOLT, DRILLED (TORQUE TO 50 IN. LBS.)	.25-20X2BOLT(A)	4
NO.	PART NAME	INVENTORY NO.	REQ'D

3D-BRAK

MATCO mfg
2361 S 1560 West
WOODS CROSS, UT 84087 (801) 335-0582

DUAL CALIPER FIVE INCH BRAKE ASSEMBLY

DRAWN BY: GARY P. LANGFORD
CHECKED BY:

SCALE: NONE
DATE: JULY 21, 1993

1 OF 1