


BRAKE PLATE ON
WHEEL SIDE OF
AXLE FLANGE WHEN
NO MHESL SPACER
USED

BRAKE PLATE ON
LANDING GEAR
SIDE OF FLANGE
WHEN MHESL
SPACERS USED

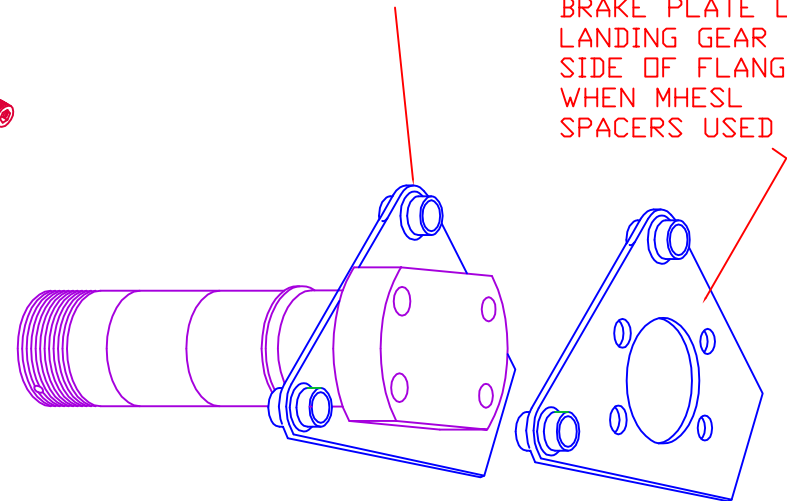

NOTE:
USE MHESL DISC SPACER & 1.50 SHCS FOR A3C AXLE
USE MHESLS DISC SPACER & 1.25 SHCS FOR A3A AXLE
USE MHESLM DISC SPACER & 1.25 SHCS FOR A19E AXLE

1. REMOVE 3 SHCS SECURING DISC TO HUB
2. INSERT MHESL OR MHESLS HEX SPACER BETWEEN HUB AND DISC
3. INSTALL NEW LONGER SHCS TO SECURE DISC TO HUB
4. TORQUE TO 46 IN-LB AND SECURE WITH LOCKWIRE
5. CALIPER BRAKE PLATE MUST NOW BE MOUNTED BETWEEN AXLE FLANGE AND LANDING GEAR TO PROVIDE INCREASED CALIPER SPACING FOR 8.00X6 TIRE